FTP | Invändig rörfixtur

Klämområde: 40-520 mm

Rörfixtur med två oberoende expanderande klämmor för koaxiell inriktning av två ihåliga cylindriska komponenter. Komponenter med olika diametrar kan centreras på en gemensam centrumlinje, exempelvis rör och fläns.

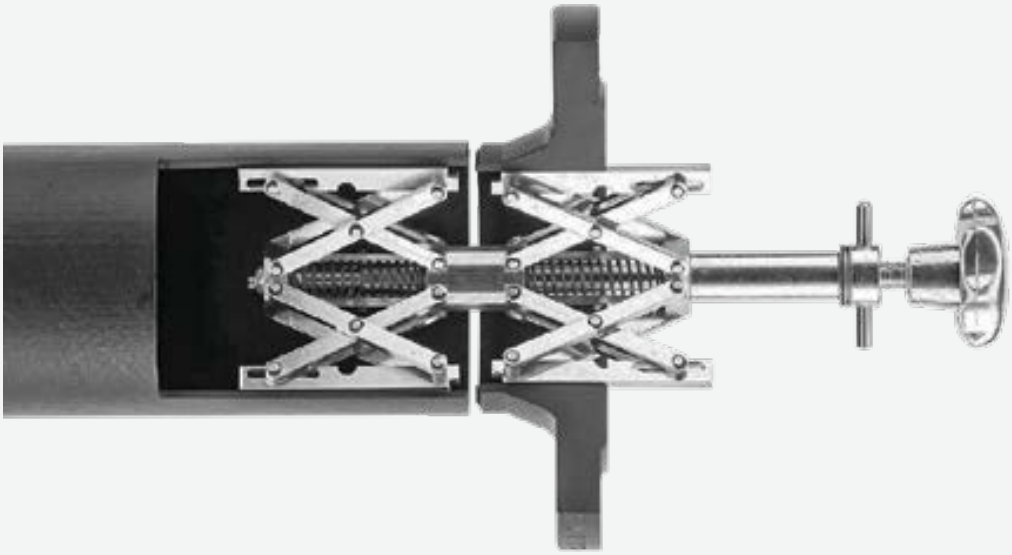

Modeller och klämområden

Modell	Klämområde (mm)	Vikt (kg)
FTP140	40-140	1,30
FTP220	85-220	3,90
FTP350	75-350	11,5
FTP520	180-520	27

Funktion och positionering

Den nedre expanderande klämman förs in i röret och spänns med ratten.

Den andra komponenten, exempelvis en fläns, placeras över den övre klämman och spänns med handtaget. Klämmorna justeras oberoende av varandra.

Utföranden

Rostfria utföranden finns som alternativ.

FTP | Internal alignment clamp

Clamping range: 40-520 mm

Tool with two independent expanding clamps for coaxial alignment of two hollow cylindrical components. Components of different diameters can be centred on a common axis, for example a pipe and flange.

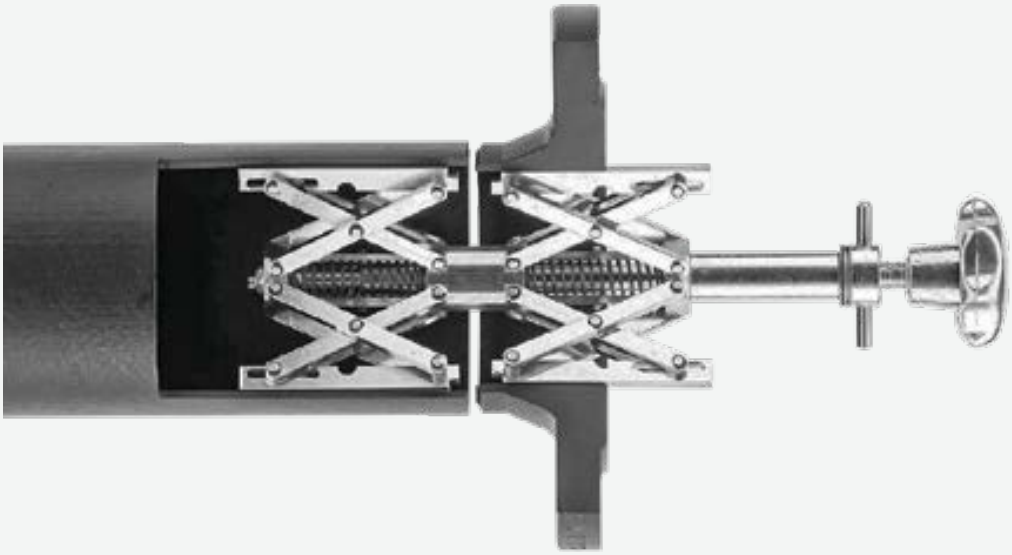

Models and clamping ranges

Model	Clamping range (mm)	Weight (kg)
FTP140	40-140	1.30
FTP220	85-220	3.90
FTP350	75-350	11.5
FTP520	180-520	27

Function and positioning

Insert the lower expanding clamp into the pipe and tighten it with the knob.

Place the second component, such as a flange, over the upper clamp and tighten it with the handbar. The clamps are adjusted independently.

Versions

Stainless steel versions are also available.